

Working Area Data Assimilation

Progress Report

| | |
|---------------------|-------------------------------|
| Prepared by: | Area Leader Benedikt Strajnar |
| Period: | 2022 January-June |
| Date: | 19/09/2022 |

Progress summary

The report summarizes the RC LACE DA activities in the first two quarters of 2022. The focuses of the group were the use of additional observations, mainly the radar data, and implementation/refinement of hourly assimilation systems suitable for NWP supported nowcasting.

The research and development on radar data assimilation has a goal to enhance the realism of modeled precipitation patterns in the initial hours of the NWP forecast. Two radar stays were executed (one remotely). RC-LACE is now on a good track to reach satisfactory results with radar reflectivity, although the overall drying effect when using all radar observations still has to be fully resolved and eliminated. At the same time, considerable steps were made to reach and provide a robust solution to radar dealiasing, to be able to use at least part of radar Doppler winds in some countries (Slovenia, Croatia). A stand-alone preprocessing software is meant for easier handling and consolidation of those developments to be shared within members.

The potential value of other observations types has been continuously investigated, among others the microlinks (rain information), InSAR and ZTD delays (humidity profile).

Significant efforts in Hungary to validate of SEKF and related use of surface observations resulted in the first operational implementation of SEKF.

Substantial efforts were still invested into tuning of assimilation in the new models setups (e.g. extensions to 90 levels in AROME Hungary) and validation of BlendVAR as future operational algorithm in Slovakia.

Last but not least, the first steps were taken to familiarize with the new C++ layer of the ACCORD/ALADIN code, which was successfully ported and used to accurately reproduce the current 3D-Var assimilation and provide first technical runs with the EnVar algorithm.

Action/Subject/Deliverable: *Operational implementation of DA suites [COM3]*

Description and deliverables:

An overview of the current operational DA systems in RC LACE countries are presented in the following two tables (yellow colors indicate the system upgrades and additions made in 2022):

Table E1: Operational DA for NWP systems run by RC LACE countries.

| DA | AUSTRIA AROME | CROATIA AL- ARO | CZECH REP. ALARO | HUNGARY ALARO | HUNGARY AROME | SLOVAKIA AL- ARO | SLOVENIA AL- ARO |
|-------|----------------------|---------------------|-------------------------|------------------|-------------------|---------------------|---------------------|
| Resol | 2.5L90, 600 x 432 | 4.0L73 480 x 432 | 2.3L87-NH 1069 x 853 | 8L49 349x309 | 2.5L60 490x310 | 4.5L63 625x576 | 4.4L87 432 x 432 |

| | | | | | | | |
|----------------|--|--------------------------------------|---|---|---|------------------|---|
| Cycle | 43t2bf11 | 38t1_bf8 | 43t2ag_op1 | cy43t2bf11 | cy43t2bf11 | cy43t2bf11 | 43t2_bf10 |
| LBC | IFS 1h (lagged) | IFS 3h (lagged) | ARP 3h | IFS 3h (lagged) | IFS 1h (lagged) | ARP 3h | IFS 1h/3h (lagged) |
| Method | OI_main MES-CAN + 3d-Var | OI + 3D-Var | OI + BlendVar | OI + 3D-Var | SEKF + 3D-Var | OI + DF Blending | OI + 3D-Var |
| Cycling | 3h | 3h | 6h | 6h | 3h | 6h | 3h |
| B matrix | EDA on C-LAEF | NMC method | EDA | EDA | EDA | - | Downscaled ECMWF ENS |
| Initialization | No (SCC) | No (SCC) | IDFI in production, SCC | DFI | No | No | No (SCC) |
| Obs. | Synop + AS Amdar/ Mode-S EHS EU Geowind Temp ASCAT, Snowgrid/MODIS snowmask. | Synop Amdar/MRAR Geowind Temp Seviri | Synop + AS (soil) Amdar/MRAR /EHS-EU) AMV/HR, Profiler, ASCAT, Temp Seviri, | Synop + AS Amdar Geowind Temp, Seviri AMSUA/MHS | Synop + AS GNSS ZTD Amdar/Mode -S MRAR Temp | Synop + AS | Synop + AS Amdar/MRAR/ EHS Geowind Temp Seviri AMSUA/MHS/IA SI ASCAT/OSCAT E-GVAP ZTD (passive) |

Table E2: Operational DA for NWP-based systems nowcasting systems at hourly scale run by the RC LACE countries.

| DA | AUSTRIA AROME-RUC | CZECH REP. VarCanPack | SLOVENIA ALARO-RUC |
|----------------|--|---|--|
| Resol | 1.2 L90 900 x 576 | 2.3L87-NH 1069 x 853 | 1.3L87 589x589 |
| Cycle | 43t2bf11 | 43t2ag_op1 | cy43t2bf10 |
| LBC | AROME 1h | - | ECMWF 1h |
| Method | OI_main MESCAN + 3d-Var + LHN + FDFA | 3DVAR + OI | 3D-Var + OI |
| Cycling | 1h | - | 1h |
| B matrix | Static EDA + differences of the day | EDA | static DSC ENS |
| Initialization | IAU | - | No (SCC) |
| Obs. | Synop + AS, Amdar/MRAR/EHS national, EHS EMADDC, Geowind, Temp/BUFR Temp, Seviri, AMSUA/MHS/HIRS/ATMS/IASI (+ Metop-C), ASCAT, GNSS ZTD (Austria + EGVAP 1h VarBC), GPSRO (OPLACE), Radar RH/Dow, INCA + AS at hig.freq., MODIS snowmask, ceiliometer | Synop + AS, Amdar/MRAR/EHS, Geowind/HRWIND, Profiler, ASCAT, Seviri | SYNOP + AWS, AMDAR/MODE-S MRAR/EHS, AMV, TEMP, SEVIRI, AMSUA/MHS/IASI, ASCAT/OSCAT, OIFS radar reflectivity |

Table E3: Operational ensemble systems in RC LACE countries that include the DA component.

| DA | AUSTRIA C-LAEF | LACE A-LAEF |
|----------------|---|---------------------|
| Resol. | 2.5 L90, 600 x 432 | 4.8 L73, 1250 x 750 |
| Cycle | 43t2bf11 | 40t1 |
| members | 16+1 | 16+1 |
| LBC | IFS-EPS | IFS 6h (lagged) |
| Method | OI_main MESCAN + 3d-Var, pert. obs. + Jk | DF blending + ESDA |
| Cycling | 3h | 12h |
| B matrix | EDA on C-LAEF | - |
| Initialization | No | No |
| Obs. | Synop + AS, Amdar, Geowind, Temp, ASCAT, Snowgrid/MODIS | Synop + AS |

In **Austria**, a modification to 2m diagnostics (CANOPY) was applied to reduce bias in summer 2022. Model version cy46t1 export was successfully compiled (Masterodb, Bator, Blend, Blendsur, Oovar), and also other components (927/001) and OOPS versions (EnVar and Hybrid

EnVar) are technically working at ZAMG and new ECMWF. The ceilometer observations from 53 stations are converted to pseudo relative humidity point observations taking into account cloud height and cover observation and model critical humidity profile and quality checks against model/satellite and then assimilated as obstype 6 RH. This can be used in the case of missed low stratus clouds (see also 2022 ACCORD workshop poster).

In the **Czech Republic**, a fully prognostic graupel was implemented in May 2022.

In **Hungary**, a lot of development work, registered under COM3.1, was invested into validation of the components of the future hourly assimilation cycle with AROME on 1.3 km resolution and 90 vertical levels. ECHKEVO diagnostics were run to investigate the spin-up time of AROME on 1.3 km resolution. Six representative points were selected in the AROME/HU domain in which the evolution of eight diagnostic variables was investigated: vorticity, divergence, u and v component of wind vector, temperature, normalised difference of pressure and hydrostatic pressure, vertical divergence at model level 90 (i.e. the lowest model level) and surface pressure. Based on the ECHKEVO outputs, the last four variables do not seem to reflect the real values correctly (Fig. E1), therefore the NNFCHK values may be wrong. However, the ECHKEVO seems to work properly for vorticity, divergence and horizontal wind. It was concluded that the points in mountainous areas have longer spin-up time with higher amplitude compared to points over flat area.

In **Slovakia**, tuning of the 3D-Var SIGMA_COEF and REDNMC by Tune BR package for the operational SHMU/SK domain. The long term experiments and case studies were performed. The implementation of the 3D-Var into operational configuration is shown to have a positive impact in the long term experiment. However, the tuning itself had a neutral impact.

In **Slovenia**, the 1.3 km 1h AROME_RUC was implemented in the operations. Products for forecasters were prepared, and prototypes of more advanced validations such as joined “stamp” plots of different runs compared to radar images and contours of strong echo cores from multiple runs. The system uses radar reflectivity DA with local adaptations of the algorithm and several radar stations, including the new Croatian radar on the Adriatic coast.

In **Romania**, no DA activities were conducted in 2022.

In **Poland**, the activities towards the first assimilation suite are ongoing, the model cycle 43t2_bf10 will be used.

Contributors: All (approx. 0.5 PM per country, more in some institutes – OMSZ 2.5)

Action/Subject/Deliverable: *Further development of 3D-Var [DA 1]*

Description and objectives:**Upgrade of BlendVar data assimilation cycle frequency from 6 h to 3 h, explore surface analysis setting/coupling within SURFEX. [DA 1.5]**

No work reported.

Refinements of B-matrix representation (EDA) [DA 1.2]

On top of earlier experiments with spin up B-matrix computation, Antonio Stanešić (CR) and Endi Keresturi (CR) calculated EDA B matrix with the same LBCs - 16 members of IFS ensemble for two-week period in winter (20210209-20210223) and two-week period for summer (20210621-20210704). Ensemble data assimilation with perturbed observations and different LBCs from the global IFS ensemble. Statistics were computed separately for winter and summer. Same sampling strategies were tested as for Bspinup: differences every 3 hours (Bens), differences valid at 00 during winter and 12 during summer (Bens00z12lj) and differences valid at 00/06 winter and 12/18 summer (Bens0006z1218lj). Comparison of Bspinup and Bens shows that for Bens more energy is present at smaller scales. This is the expected result as by adding observation perturbations we expect to generate more energy at smaller scales. Background error standard deviations are generally larger for ensemble B then Bens with rather similar shape. Overall obtained results are expected for methods used to generate forecast differences. As for the sampling strategy the best results are obtained by using 00/06 and 12/18 differences which gives less smoothed diagnostics. Tuning was done using the method proposed in Desroziers et. al (2005), using the TuneBR package. Scripts were adapted to our local environment and MANDALAY was replaced by a call to odb_legacy (odbsql.x). At first data assimilation cycle (3h) using Bens and synop, amdar, mode-s mrar si/ch, geowind, temp and Sevir data was set up with Bens, REDNMC=0.7 and SIGMAO_COEF=1 for all obtypes. Cycling was performed for the period 01.05.2021 – 15.06.2021 and the period from 15.05 - 15.06.2021 was used for diagnosing observation error standard deviations (so) and background error standard deviations (sb). Final output of calculations in this package are ratios of diagnosed and predefined values for background (rb) and observations error (ro). These ratios are presented for several variables averaged over height and as averages over all variables weighted by the number of data. From these ratios new REDNMC can be obtained as $REDNMC_{new} = rb * REDNMC$. For observation error, tool returns diagnosed values per variable and averaged over all obtypes. On the other hand tuning is possible via SIGMAO_COEFF (Bator, Screening, Minimization namelists) where one can modify values of observation errors per obstype (one SIGMAO_COEF value for obstype multiplies values for all variables in given obstype). Thus, results obtained via this tool does not give us possibility to make obstype dependant tuning rather one value could be used for all obtypes. Several

iteration were performed, but instead of getting convergence REDNMC was increasing while SIGMAO_COEF was decreasing with every iteration. The starting values were kept finally.

The ensemble data assimilation (EDA) technique is applied at **OMSZ** to compute the background error statistics. The downscaled B-matrix has been completed so far for four ten-day periods from each season during which 4 ensemble members of AROME, initialized at both 0 UTC and 12 UTC. The B-matrix was calculated using the difference of 4 members (i.e. RUN1-RUN2, RUN1-RUN3, RUN1-RUN4, where RUN1 is the control member, RUN2, RUN3, RUN4 are the perturbed members). The biggest difference between the seasons is in the standard deviation for summer humidity, which has a big impact for the overall B-matrix as well (left panel of Fig. 1.1). The smallest seasonal difference is observed for temperature. The standard deviation for the 90 level B-matrix is smaller for all 4 variables than for the 60 level B-matrix (right panel of Fig. 1.1).

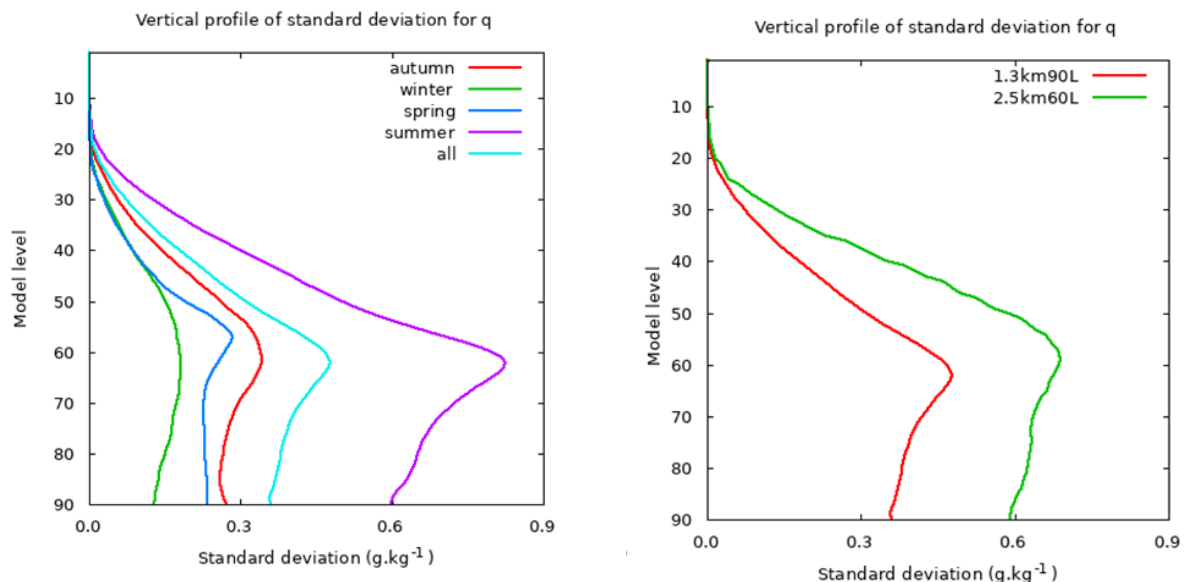


Figure 1.1: Vertical profiles of standard deviation for humidity in the downscaled B-matrix at 90 levels in the four seasons all together and separately (left) and in the previously computed B-matrix at 60 levels and the downscaled B-matrix at 90 levels (right). [registered under COM3.1]

Evaluation of error statistics for the methods allowing to preserve results of host model analysis in a LAM domain Jk. [DA 1.3]

The impact of Jk and its different configurations were assessed by Endi Keresturi (CR) in the ALADIN-HR4 (4 km, ALARO, cy43 based configuration) assimilation cycle. ECMWF-EPS files (all

4 runs and 0-6 forecast ranges) were interpolated to this domain by doing c903 for two different periods: 9. 2. - 23. 2. 2021 (winter) and 21. 6. - 4. 7. 2021 (summer). Three alternatives of the V-matrix were calculated:

- using +000 (analysis) files from ECMWF-EPS. Differences were calculated using the first 10 members (1-2, 3-4, etc.). 00 and 06 (12 and 18) UTC runs were used from the winter (summer) period. This gives a total number of 290 differences.
- using +003 files. Everything is the same as above.
- using +006 files. Everything is the same as above except that 18 and 0 (6 and 12) UTC runs were used from the winter (summer) period.

Each of these three matrices is used with the appropriate global model analysis/forecast in data assimilation cycle. Three different experiments (to find the optimal configuration for Jk) during the period of one month (15. 5. - 15. 6. 2021; 0 runs have been verified) were done:

- Different values of ALPHAK* coefficients were tested. They control the large-scale impact of each control variable independently. Results indicate that it is better to add more weight to the large-scale variables (vorticity and temperature) and less weight to humidity and divergence. Adding too much weight to the humidity had the effect of drying the model.
- Impact of PRESINFJK and PRESUPJK coefficients were tested. They control the height from which the Jk will start to make an impact. Results indicate that the impact of Jk for surface variables is stronger if it is active closer to the ground.
- Different values of the large-scale cut-off wavenumber (N). Here, a new method of dynamically varying (i.e. flow-dependent) wavenumber was tested (Feng et al., 2020). Results indicate that experiments are not that sensitive to the value of N, and experiment using flow-dependent N is not significantly different from the one using static N. However, the 12 UTC runs and individual cases haven't been investigated yet.

Finally, the impact of Jk itself was assessed over the same verification period. Overall, using Jk has a positive impact on the model forecast (Figure 1.2), mainly visible for upper-air variables; the Jk will be used in operation at DHMZ.

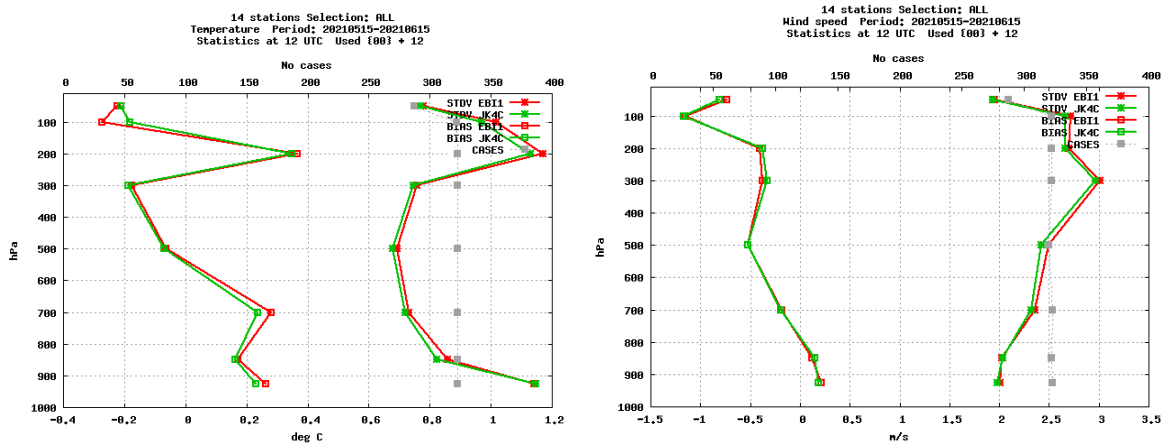


Figure 1.2: Comparison of reference (no Jk; red) and Jk (with Jk; green) experiments for temperature (left) and wind speed (right) for +12 forecast range.

Efforts: 3.5 month

Contributors: A. Stanešić (CR) 1, E. Keresturi (CR) 0.25, S. Panežić (CR) 1, M. Derkova (SK) 0.75, B. Strajnar (SI) 0.5

Documentation: /

Status: ONGOING

Action/Subject/Deliverable: *Development of flow-dependent algorithms [DA 2]*

Description of tasks:

Make first steps towards 3D EnVar by getting familiar with the relevant OOPS code

Work reported under DA6.

Documentation: /

Status: ONGOING



Action/Subject/Deliverable: *Use of existing observations – radar [DA 3.1]*

Description of tasks:

Validation of the solution for wind dealiasing (torus mapping)

Vito Švagelj (SI), Peter Smerkol (SI) and Benedikt Strajnar (SI) evaluated dealiasing method implemented in HOOF by studying and inter comparing first guess departures of radar radial winds, aircraft winds and radiosonde winds for all analysis times (3-hourly cycle) in year 2021. The goal is to estimate the error of dealiased winds by (triple) collocation between observations and in comparison with the first guess, and to study the performance of QC for radial winds. From the inter comparison between collocated observations it is evident that the

standard deviation of differences between observations are higher when radar wind is involved. However, the majority of the increase comes from the tails of the difference distribution which is largely Gaussian otherwise. A fairly similar value, however, can be reached when the rejection limit in the background check is set to 15 m/s (tails of the distribution removed). Figure 3.1 shows the inter-comparison for radar sites with NI > 30 m/s, those with NI < 30 m/s and separately for Slovenian radars with NI = 8 m/s. It can be concluded that the dealiased data sets are in general of lower quality, but for the radar that are noise-free, a similar quality can be reached. Similar conclusion can be drawn from the first guess departure analysis.

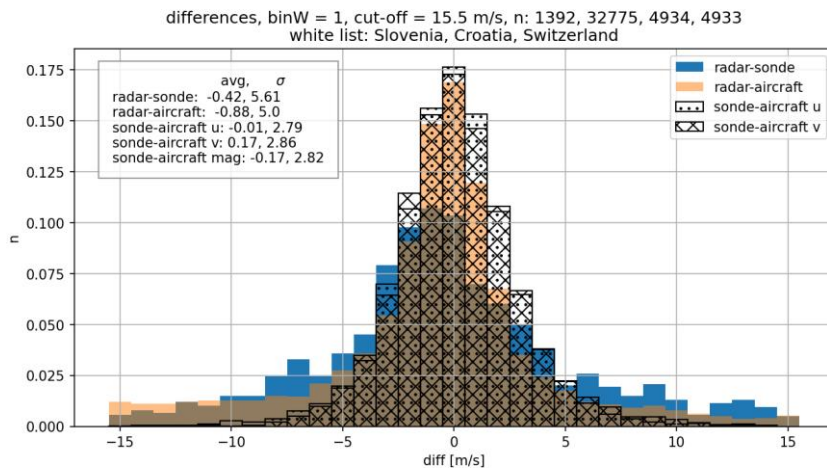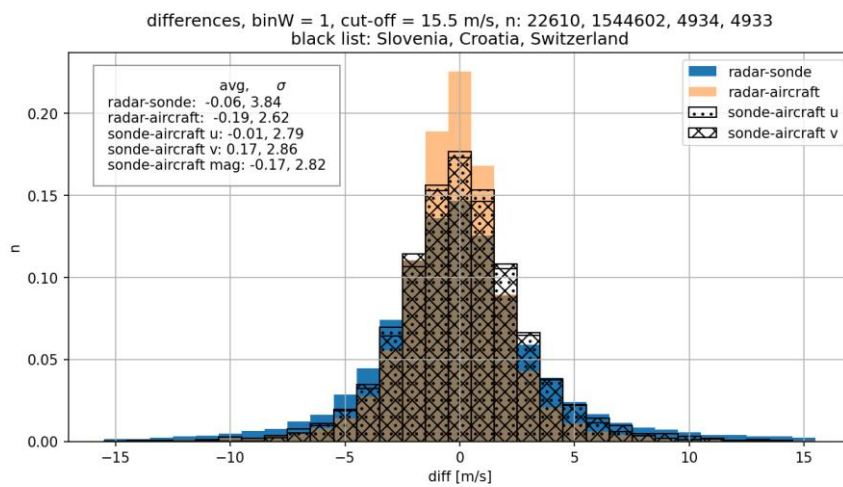

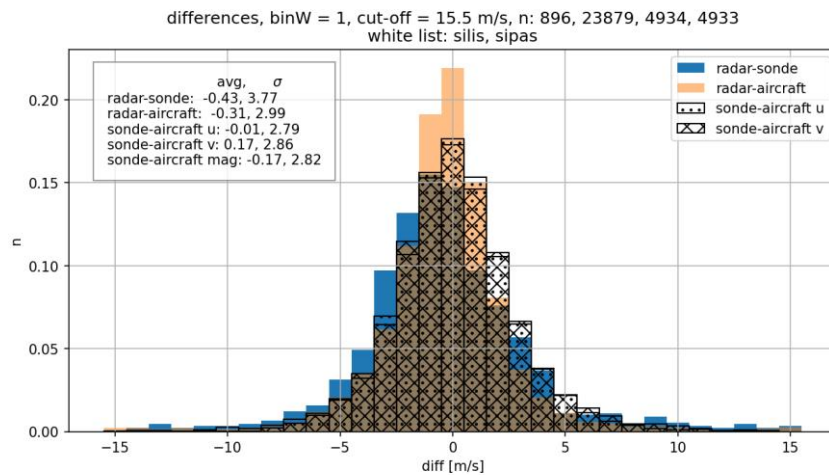


Figure 3.1: The distribution of differences between pairs of colocated radar, radiosonde and aircraft observations (all calculated in terms of Doppler radial wind) for countries with high NI (top), for those with $NI < 30$ m/s (middle) and for the Slovenian two radars (bottom).

Impact studies with original and de-aliased OPERA Doppler wind data

No work reported.

Impact studies with OPERA reflectivity observations

Benedikt Strajnar (SI) continued impact studies with radar reflectivity observations from OPERA in the ALARO model over central Europe, with focus on the use of dry reflectivity observations. Apart from two alternative approaches to the use of “undetected” observations (use of wet pixels in obs/fg. only, modified drying using the non-rainy model environment), a modification of estimation of minimum detectable signal, as proposed by Antonin Bučanek (CZ), is also considered for comparison. A bugfix which prevented using French radars (OPERA product) was also applied in BATOR. The experiments, now migrated to VEGA EURO-HPC centre in Slovenia, are ongoing.

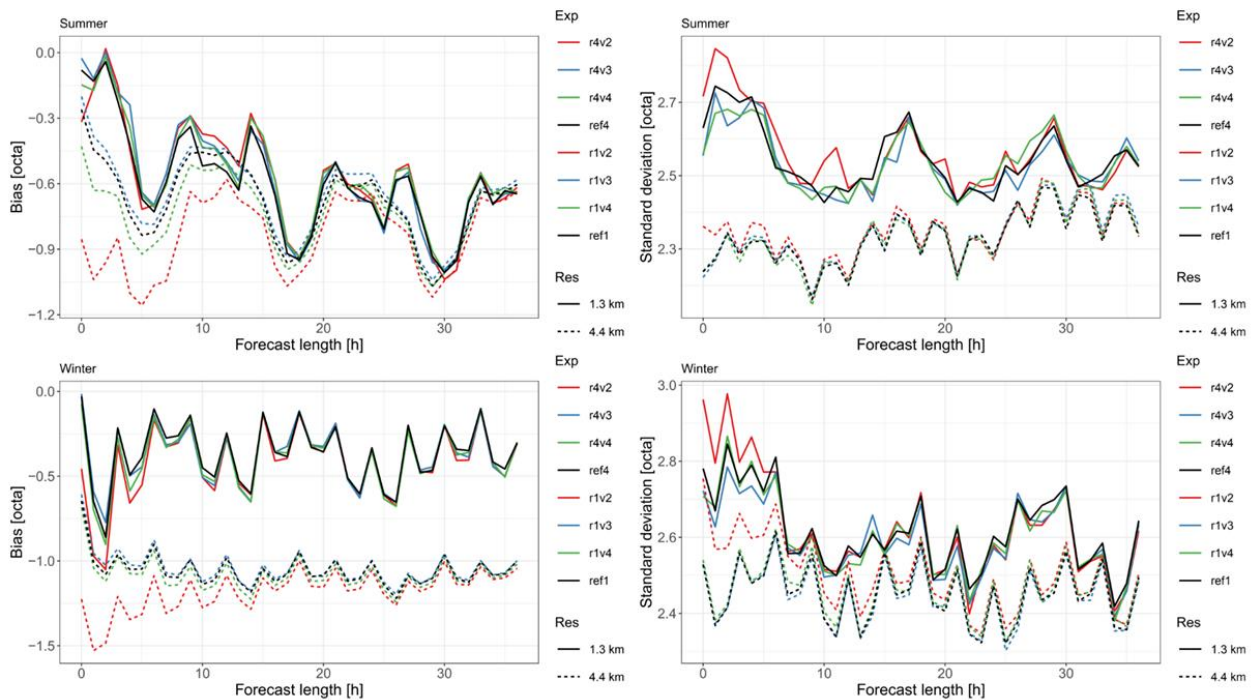


Figure 3.2: Bias (left) and standard deviation (right) of cloudiness for summer and winter period in ALARO suites at 1.3 (full line) and 4.4 km (dashed line). Reference experiment (black), default radar DA in red, wet-pixels only experiment (green) and modified drying using the non-rainy environment (blue). The default radar reflectivity DA setup clearly degrades the cloudiness while the alternative approaches perform clearly better.

The work on radar DA by Antonín Bučánek (CZ) continued. The observation operator for radar reflectivity was investigated for possible errors related to ALARO physics, there is a bug in CY43T2_bf11 related to air density which is kept constant over vertical, this is fixed in CY46T1_bf07, only a minor bug remains (reported to MF, routine reflsim_2dop.F90). The same bug is in fullpos for reflectivity! Several tests trying to mitigate problems with “dry observations” (undetected) in OPERA data were performed. Assimilation of those observations rely on the minimum detectable reflectivity factor (MDRF) at 1km from radar. CY43T2_bf11 kept this value constant for all radars which is not appropriate, on CY46T1_bf07 the minimum detectable reflectivity factor is computed from data itself. This approach only works when rain is observed by radar and for some radars does not work at all. Due to explained reasons a table for MDRF was created for each radar, computed by automated algorithm over a longer period. To compensate for possible errors in the MDRF and observation operator the offset of 10dBZ was added to computed values. This approach mitigates a problem of drying but not completely, further investigation is needed.

Kristóf Szanyi (HU) worked in a remotely organized LACE stay in Hungary on the topic of assimilating OPERA radar reflectivity data in the AROME/HU system under the supervision of

Benedikt Strajnar (SI). The main goal was to introduce radar reflectivity data assimilation in a test experiment based on the operational model and evaluate the impact on the forecast quality. Two experiments were set up: (1) a reference run based on the operational AROME setup which does not include any radar measurements and (2) an experimental setup including the assimilation of radar reflectivity data. Both experiments were run between 27 June and 31 July 2021 with 36-hour forecasts each day at 0, 6, 12 and 18 UTC. During the screening and minimization processes a number of memory-related issues have arisen due to the size of the radar data. These issues were solved by reducing the number of assimilated radars to only six (four Hungarian and two Slovenian) radars. The largest positive impact was found in precipitation, relative humidity and cloud cover forecasts. The improvement in the cloudiness forecasts (Figure) is most likely linked to the drying effect caused by the assimilation of radar reflectivity that was experienced by others in similar experiments. The verification shows neutral to small negative impact in case of surface and upper-air parameters. (3 PM)

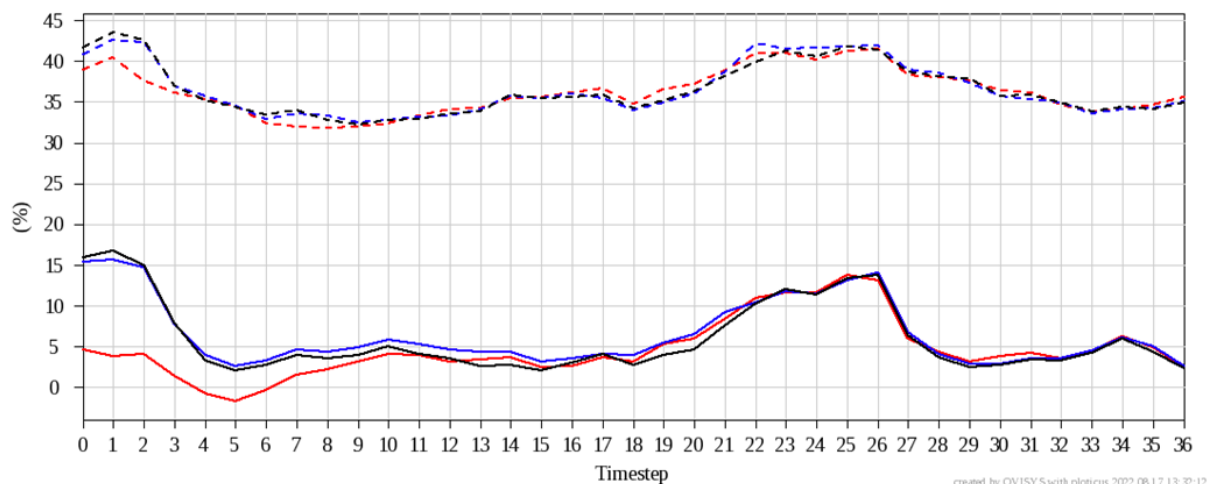


Figure 3.3: Bias (solid line) and RMSE (dashed line) of total cloudiness in function of the lead time for the 0 UTC runs of the test experiment (red), the reference run (blue) and the operational AROME (black).

Updates of the HOOF preprocessing tool

Peter Smerkol (SI) developed an upgrade of the homogenization, dealiasing and superobbing tool for radar data files from OPERA (HOOF2). The dealiasing procedure has been slightly modified, in order to improve the rejection of wrongly dealiased data. Before, the 100 m height intervals, which did not contain enough points, were increased by steps of 100 m until they contained enough points, but this led to many height intervals for which the linear wind assumption was no longer correct. Now, intervals with a small number of points are simply rejected. The second change is that a maximum allowed dealiased velocity in the fit is

introduced as a settable parameter. This change rejects non converged fits which would set the dealiased velocity to a very large number and as a side effect, also prevents the dealiasing of radars with a large Nyquist velocity that do not need to be dealiased. The HOOF now also includes superobing, based on the preopera.py script, with some minor changes - the elevations are not reduced if they overlap, and the procedure for superobing was changed to allow for bins of (almost) arbitrary size in the ray direction.

Efforts: 11.5

Contributors: A. Bučánek (CZ) 5, A. Trojáčková (CZ) 0.75, B. Strajnar (SI) 2, P. Smerkol (SI) 1.5, V. Švagelj (SI) 0.75, K. Szanyi (HU) 1.5

Documentation: HOOF user guide, updated; RC lace stay reports

Status: ONGOING

Action/Subject/Deliverable: *Use of existing observations - other observations [DA 3]*

Refining the application of Mode-S observations in DA systems with increased assimilation cycle frequency, change of data source, whitelisting. [DA 3.2]

No work reported.

Evaluation and impact assessment of E-GVAP ZTD. [DA 3.3]

No work reported.

Test feasibility and impact of InSAR delay assimilation from Sentinel-1. [DA 3.5]

Florian Meier (AT) built a Python interface to convert Sentinel-1 InSAR data into slant delay obsoul format and thin the data. This also includes a conversion from relative change to absolute delays by adding FG values from ODB. First assimilation test shows that the data are strongly biased and therefore appropriate bias correction development will be the next step. He also started to implement VARBC for slant delays.

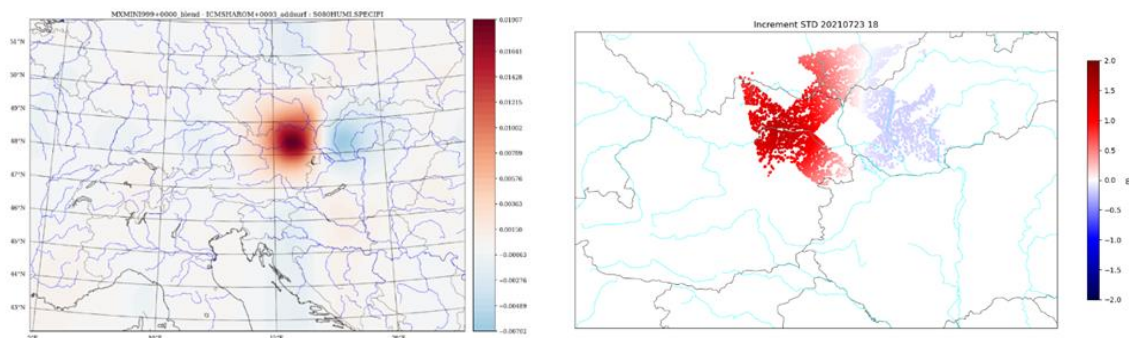


Figure 3.4: Increment in specific humidity level 80 (about 200m above ground) (left) and increment of STD at observation points (~24300) 23rd July 2021 18UTC (right).

Use of mobile GNSS sensors on Austrian trains in cooperation with Technical university of Vienna [DA 3.3]

Florian Weidle (AT) evaluated the data set of ZTD observations from moving retrieved for the period from 9.9.2021 to 15.10.2021. For this period data from approximately 10 trains per day are now available and will be used in AROME-RUC. The trains are located in roughly 5 areas for most of the days. A reference run with AROME-RUC has been set up where the train data are assimilated passively to analyze the FG-departures and to develop a reasonable bias correction.

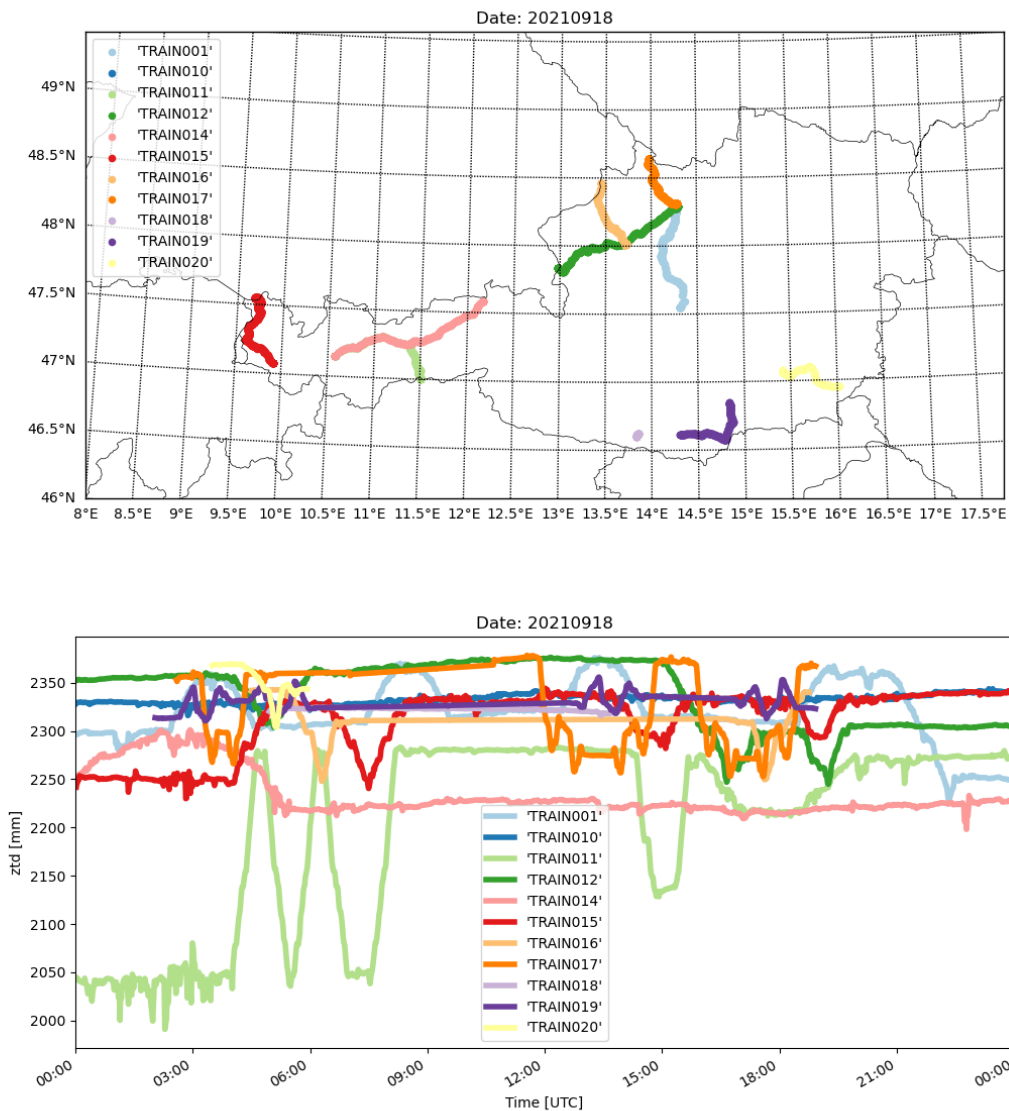


Figure 3.5: Example of train tracks available for one day. Train tracks are shown in the upper panel and the observed ZTD as function of time in the lower panel. Some trains (e.g. TRAIN011) are circulating several times between two cities.

Optimization of the use of existing AMV observations, including high resolution winds (NWC/GEO-HRW), optimization of blacklisting and performing impact studies. [DA 3.5]

No work reported.

Sensitivity studies with individual polar-orbiting sensors, with emphasis on new sensors such as ATMS and IASI, which will be included on board the next generation geostationary satellites (MTG). Eventually feasibility study with GNSS-RO. [DA 3.6]

No work reported.

Implementation and test of high-resolution radiosondes in BUFR. Sensitivity of extra radiosonde data. [DA 3.8]

Four days in December 2021, extra radiosonde measurements were added to the AROME assimilation system at 6 UTC in Szeged and/or Budapest in addition to the regular radiosondes at 0 UTC and 12 UTC. The impact of the extraordinary radiosondes was investigated in case studies by Anikó Várkonyi (HU). Two experiments were run: AROME_TEMP6 represents the operational AROME/HU which includes all available observations, while AROME_noTEMP6 represents the run without the extraordinary 6 UTC sounding data. The analysis increments are much larger in AROME_TEMP6 both at higher and lower model levels (Figure). In these winter precipitation conditions, a positive effect of the extra radiosonde measurement was observed in the first hours of the forecast. Greater improvements were seen in the high atmosphere parameters than in the surface parameters, but in several cases significant improvements were also seen at the surface.

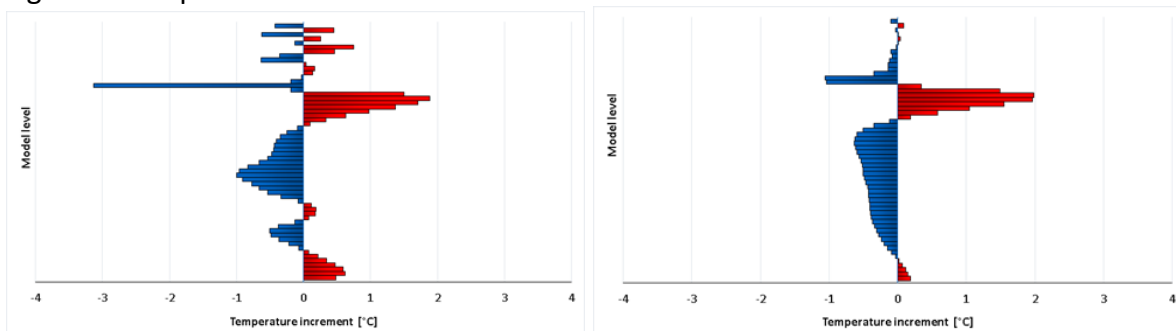


Figure 4.1: Analysis increments with radiosonde data at 6 UTC on 12 December 2021 (left) and without it (right) in the function of model levels.

Enhanced QC for dense surface observations base on A-LAEF. [DA 3.9]

No work reported.

Assimilation of Sodar observations [DA 3.10]

No work reported.

Efforts: 6 months

Contributors: F. Weidle (AT) 1.75, A. Varkonyi (HU) 1.25, F. Meier (AT) 2.25, H. Toth (HU) 0.5, S. Panežič(HU) 0.25

Documentation: /

Status: ONGOING

Action/Subject/Deliverable: *Use of new observations types [DA 4]*

Finalization of the implementation of slant tropospheric delays (STD) in the common model cycles (in cooperation with HIRLAM). [DA 4.2]

No work reported.

Explore the potential of volunteered observations from crowdsourced, private weather stations. Use these measurements for NWP case studies to show their potential. [DA 4.4]

No work reported.

Refinement of the preprocessing to efficiently separate dry and wet attenuation, which should lead to a reliable relationship between attenuation and rain rate. [DA 4.10]

Peter Smerkol (SI) studied methods to obtain rain rate observations from attenuation of microwave signals, using 3 months of data obtained from the mobile link network of one of commercial mobile providers. Rain rate is obtained from attenuation of microwave links with a general formula $\Delta P = A_R + A_B$, where ΔP is the difference between the power from the transmitting antenna and power on the receiving antenna, A_R is the attenuation of signal from rain and A_B is the baseline attenuation, which contains power losses from all other sources (free space loss, wet antenna attenuation, losses in the receiving and transmitting antennas, air humidity, vegetation, etc.). Rain rate attenuation can be expressed by using Mie scattering calculations (Hergert et al.) and an approximation for path-averaged quantities along the link (Olsen et al., Leijnse et al.). The final expression is $A_R = L \langle R \rangle^a$, where L is the microwave link length, $\langle R \rangle$ is the path-averaged rain rate, and a and b are coefficients dependent on signal frequency, drop size distribution, temperature, etc., but not on the rain rate. For a and b , a table of coefficients for different frequencies is used, taken from the RAINLINK R package (Overeem et al.). The problem is then translated to determining the baseline attenuation A_B , which is not dependent on the rain rate, but is dependent on a large number of other quantities. Accurately determining the baseline is connected to determining the wet and dry period in the data. This can be difficult, because the baseline fluctuates due to its many dependencies, and at least for the start of the rainy period, the rain rate attenuation is comparable to the baseline fluctuations. There are many propositions for automated algorithms that determine the baseline and after trying some of them, we opted to use the factor graph algorithm (Loeliger et al., Reller et al.), which uses the factor graph approach to process the time series of attenuation data. It simultaneously determines the wet and dry periods and the baseline itself by treating the attenuation data as

noisy observations of a time series, with dry periods having much smaller noise than the wet periods. A program which implements the Loeliger algorithm was written in Python and C++. It was tested on a dataset provided by one of the commercial mobile providers. The dataset has about 3 months of attenuation data from 1700 mobile links, measured in 15-minute intervals and contains dry and rainy periods. The algorithm seems to work reasonably well (see examples below), but tuning of free parameters and verification is yet to be done.

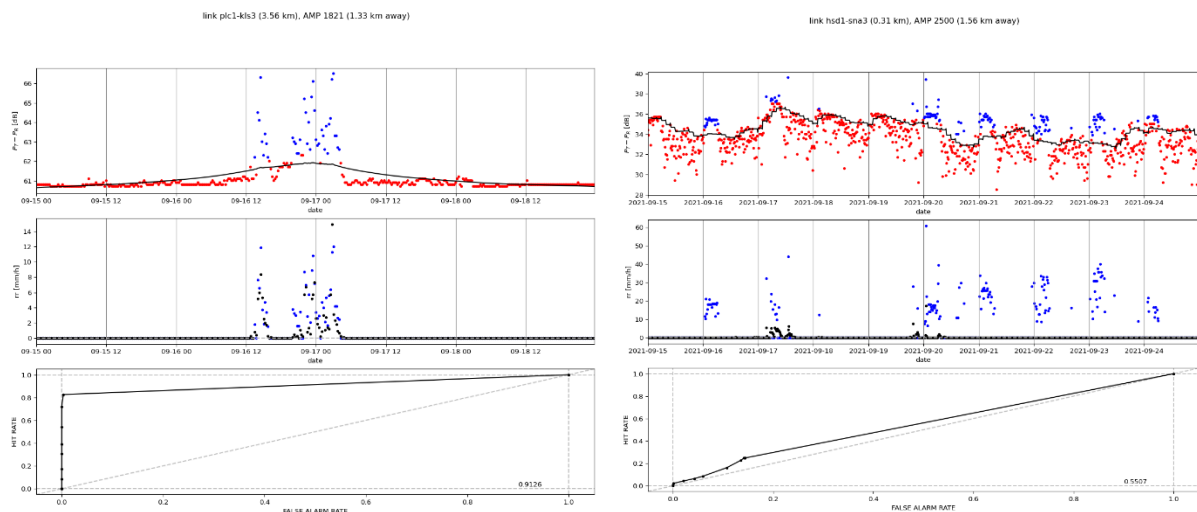


Figure 4.1: Examples of good (left) and bad (right) baseline determination with the factor graph algorithm. Upper plots show the determined wet (blue) and dry (red) points and the calculated baseline (black line). Middle plots show the calculated rain rate (blue points) in comparison to measurement from a nearby measuring station (black points). Bottom plots show the ROC curve.

Phillip Scheffknecht(AT) prepared an AROME installation to assimilate the detected rain events as 100% relative humidity at the centre point of the microwave links and wrote a Python program to convert the data to pseudo-radiosondes, i.e. a sounding with a single observation point at a given height. This allows the point observation to be placed at the exact location and altitude. The 100% RH observations were tested with the 3D-VAR of AROME. The idea is to moisten the atmosphere in locations where rain is observed to support the formation of convection within the model in locations where it might have been missed. The binario observations (rain vs. no rain) were converted into single 100% relative humidity points and then into OBSOUL as PILOT observations, as these conveniently allow to set longitude, latitude, and altitude of the observation without having to convert metres above sea level to pressure.

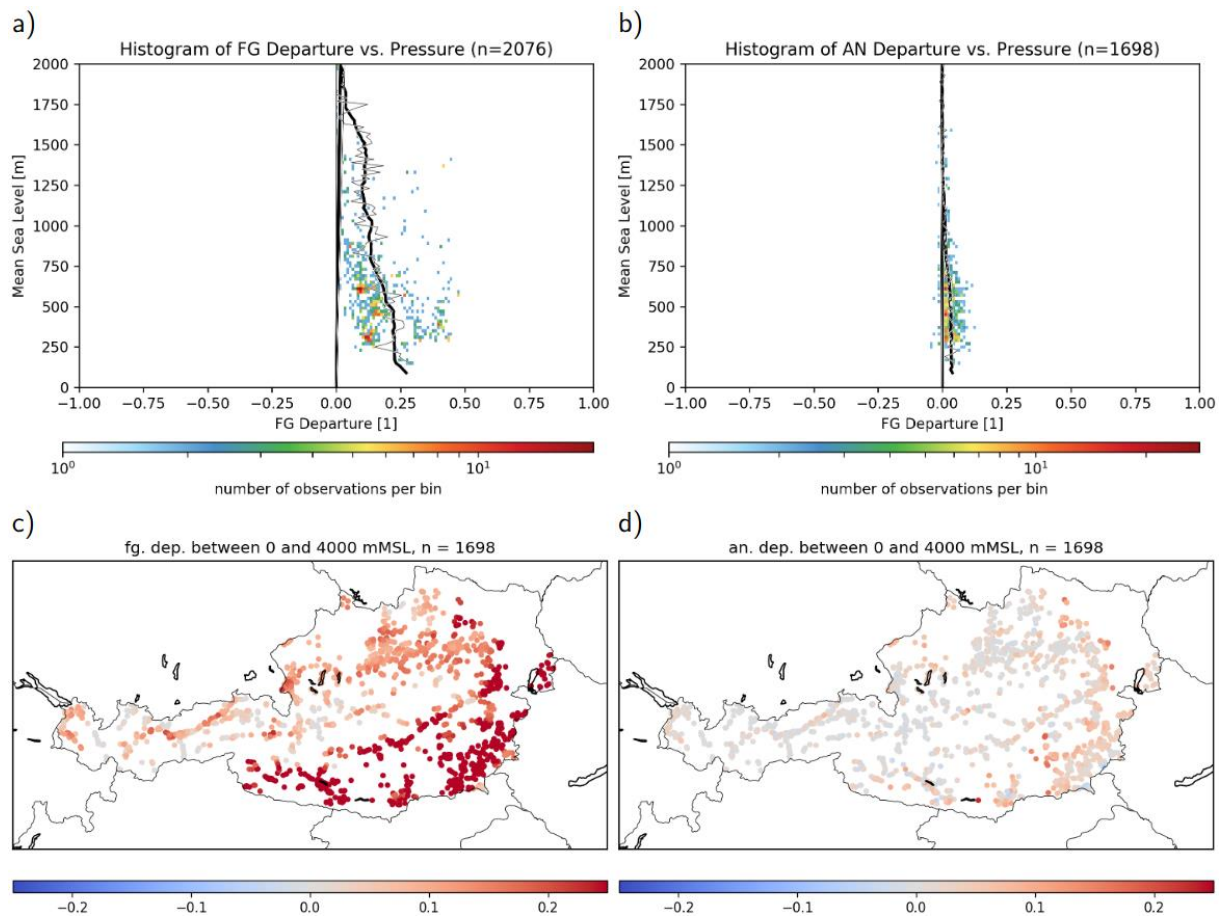


Figure 4.2: 2D height-departure histogram of the link measurements assimilated during the *init01* experiment. The colour indicates the amount of observations for the given altitude and with the given first guess departure. The total number of observations is 1690 (out of 2084 screened observations). The thin black line shows the average departure for each altitude level, the thick black line shows five point running mean over multiple levels.

The model corrects heavily toward the new humidity observations, no thinning happens because it is generally assumed that PILOT observations are relatively scarce. In addition, most other humidity observations are surface stations whereas the links provide points above the ground. Figure ML2 shows a height-departure histogram for the first guess (a) and analysis (b) departures. The heavy correction is visible as concentration of the points close to the zero-line. Geographically, the first guess (c) and analysis (d) departures show the most extreme values over the south of Austria, where relative humidity has increased by about 20%. To account for the increase in instability, the model decreases temperature by around 0.5 - 1.5 °C. Despite this, the resulting forecast overestimates rain significantly (verification not included here). This result shows that such binary observations could potentially be used to insert humidity into cases where the model is too dry, but a substantial amount of tuning would be necessary, like adjusting the observation error accordingly and thinning the observations. However, the higher priority goal in the near future is to make use of quantitative

observations from 80 GHz links, which were completed during the summer. Ongoing work will focus on those observations.

Efforts: 2.5 month

Contributors: P. Scheffknecht (AT) 2, P. Smerkol (SI) 0.5

Documentation: /

Status: ONGOING


Action/Subject/Deliverable: *Development of assimilation setups suited for nowcasting [DA 5]*

Validation and application of observations (those from DA 3) in RUC


No work reported.

Design/improvement of existing and new RUC prototypes based on 3D-Var (Austria, Hungary, Slovenia, Slovakia). [DA 5.2]

André Simon, Michal Neštiak, Martin Dian, Mária Derková, Martin Imrišek (all SK) worked on a RUC prototype with hourly cycling aimed as a future nowcasting and very-short-range forecasting system at SHMÚ. It provides 0-12h forecasts with 1 km horizontal resolution and 63 vertical levels, using non-hydrostatic dynamics, CANARI and 3DVAR assimilation. Currently, basic setup of the RUC is still developed and tested, the system runs regularly but it is not operational yet. Stability tests, comparisons with INCA-SK nowcasts and case studies were performed. Situations with frontal passage and deep convection focusing on the Lake Balaton region (Hungary) were investigated with more details and consulted with colleagues from OMSZ. Deficiencies of the RUC forecasts in nowcasting range (0-6h) were identified, namely lack of upper-air data in short cut-off time (35 min.) archive followed by inconsistency of the upper air temperature with the conditions in 2m. Consequent suppression of deep convection caused a substantial (~2 h) delay in the forecast of the frontal passage over the Lake. Experiments indicated that use of additional observations (e.g. in the long cut-off archive, not available at the time of the original run) can substantially improve the results (see the Figure below). Although less perspective from nowcasting point of view (due to up to 6h delay), further sensitivity tests may reveal the impact of respective assimilated surface and upper-air data on the dynamics of front passages and density currents associated with deep convection. Results should help to find optimal strategy for the RUC suite (cycling, right timing of the run, when key data are available, etc.) and its use in nowcasting and very-short-range forecasting.

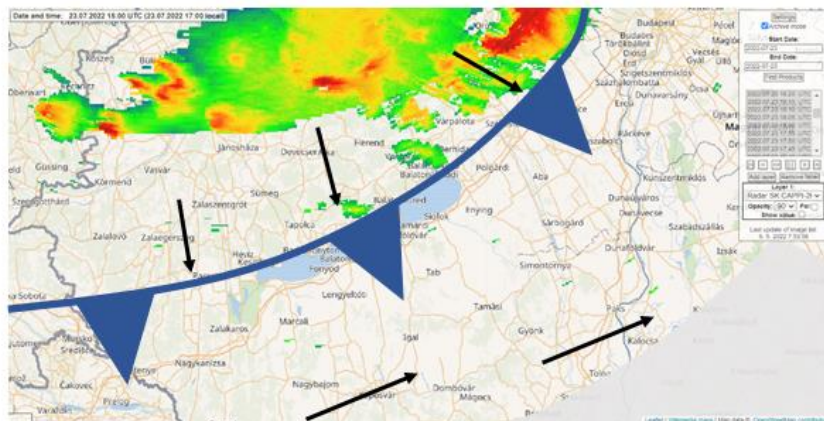

2km CAPPI radar reflectivity [dBz] and schematics of the cold front position and flow on 23 July 2022 15 UTC after observations

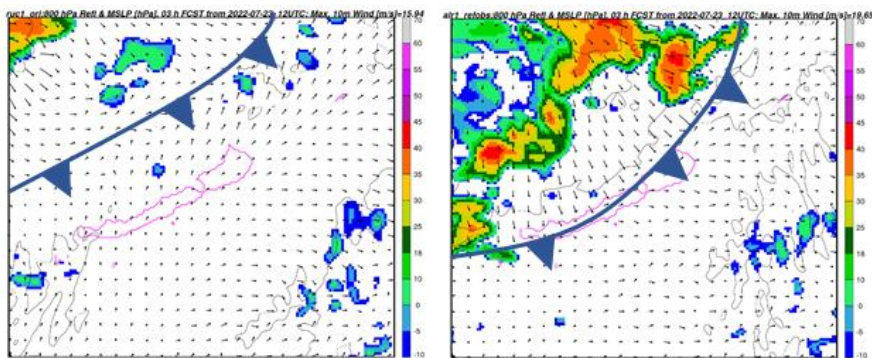

Simulated radar reflectivity [dBz], MSLP [hPa], 10m wind [m/s] from the original RUC1 run (left) using short cut-off and from experiment with long cut-off data (right)

Figure 5.1: Comparison of short (NWC) and long cut-off high-resolution (1 km) runs.

Benedikt Strajnar (SI) performed final validations of the ALARO-RUC prototype which turned operational in May 2022, including the implementation of Obsmon for assimilation and production cycle. Radar dataset was expanded with new sites from Croatia. Special products to visualize different model runs at the same time were also designed.

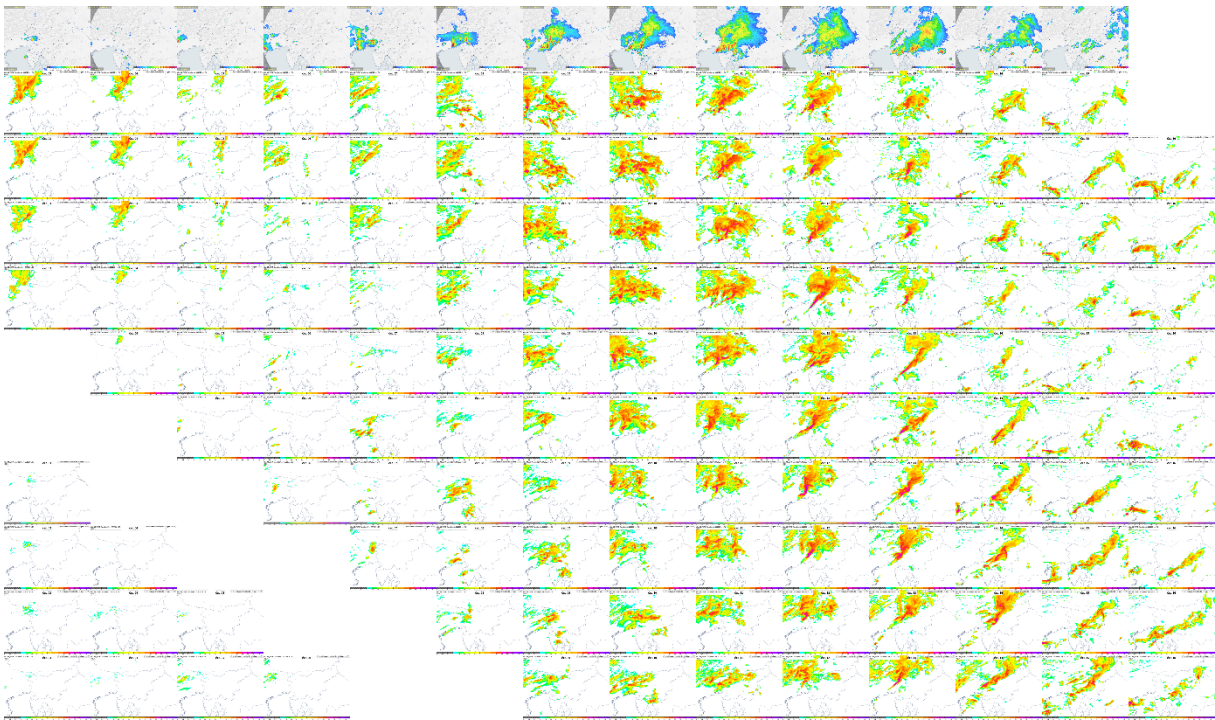


Figure 5.2: Comparison of hourly radar images (top row) with corresponding ALARO-RUC forecasts of different age. White frames indicate missing runs.

Explore possibility to initialize/modify the hydrometeors values in AROME-RUC by radar-derived rain type in AROME-RUC. [DA 5.3]

No work reported.

Total efforts: 5 months

Contributors: Kristóf Szanyi (HU) 2.25, B. Strajnar (SI) 0.5, André Simon (SK) 0.75, Michal Neštiak (SK) 0.5, Martin Dian (SK) 1, Mária Derková (SK), Martin Imrišek (SK), partly reported under HR

Documentation: /

Status: ONGOING

Action/Subject/Deliverable: *Participation in OOPS development [DA 6]*

Run and compare 3D-Var minimization run using OOPS and non-OOPS binary with similar setting, initially at MF's computing platform. Port the relevant cy46t1 code and reproduce the experiment locally.

Florian Meier (AT) built scripts to run OOPS 3D-Var, 3D-EnVar and hybrid 3D-Var with cy46t1 export and a script based on ePyGram command-line applications to prepare C-

LAEF files for EnVar (conversion to GP space output, removal of some fields) on ZAMG HPC and new ECMWF HPC. This information was also provided to the ACCORD team during DAWW. It was tried to run a whole 3D-EnVar cycle with GP space files, but OOPS EnVar failed to read GP first guess files so far. Also the change of resolution between EPS and analysis in EnVar was successfully tried. Increments look reasonable and the usage of a lagged ensemble in EnVar creates a very similar increment shape. Several horizontal localization lengths were tested.

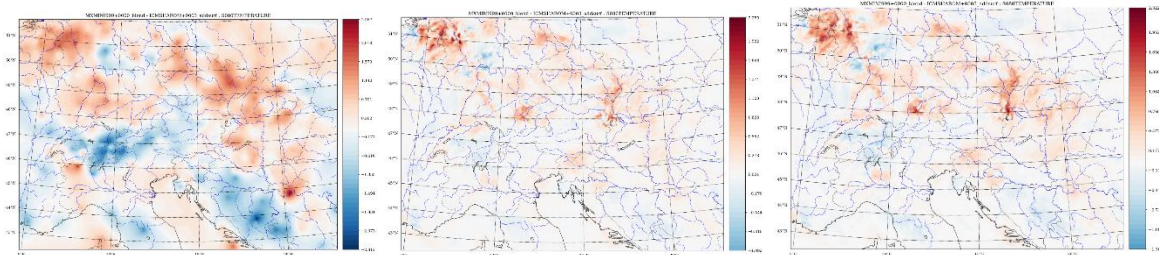
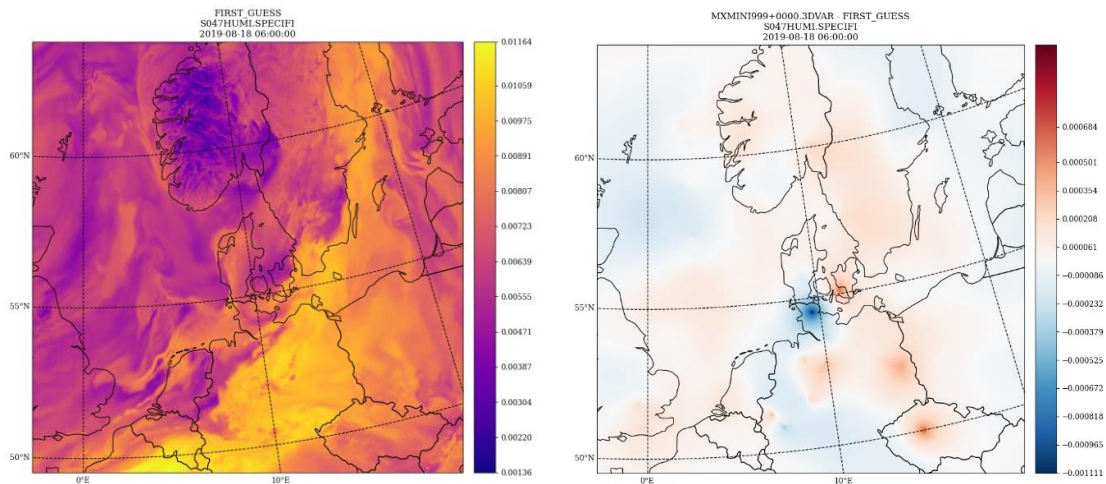


Figure 6.1: 3h AROME temperature increment on level 80 (200m above ground) 29th July 2022 06UTC: OOPS-3D-Var(left), EnVar with 16 member C-LAEF(middle) inflation 0.5, 34 member EnVar lagged C-LAEF+2 control(right) inflation 0.6. Localization type 1; 100km/0.2.



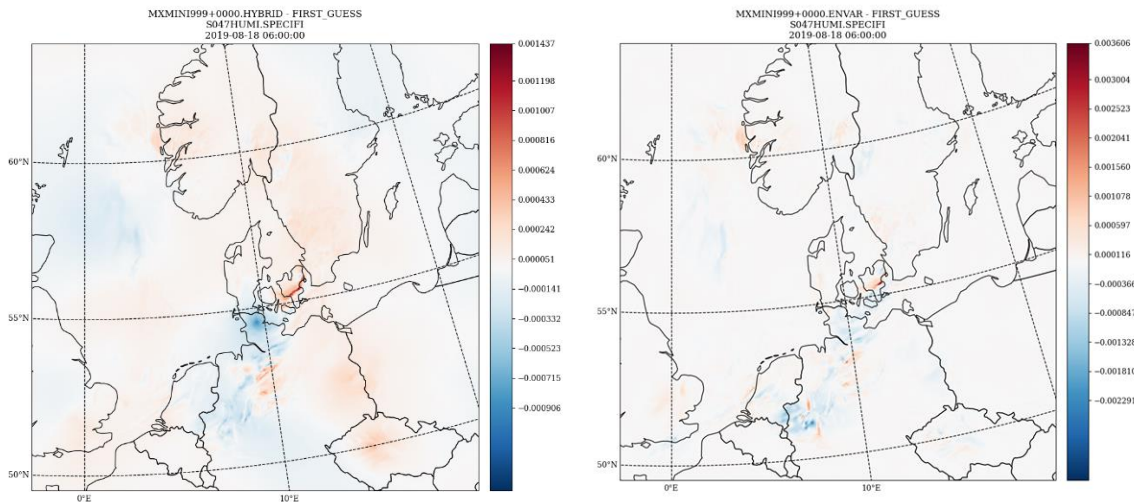


Figure 6.2: Specific humidity increment at level 47/60 in AROME-DK. Figst guess field (upper left), 3D-Var increment (upper-right), hybrid EnVar (bottom left), and pure EnVar (bottom right).

During the ACCORD DA workshop in Barcelona, advanced algorithms enabled by the OOPS system were technically tested over a sample Danish AROME domain and using the MetCOOP EPS system. Results look realistic: EnVar increments are anisotropic and aligned with the frontal zone which they don't cross. On the other hands, EnVar produces smaller and noisier analysis so a hybrid combination with 3D-Var may be preferable.

Total efforts: 2.75 month

Contributors: F. Meier (AT) 2, B. Strajnar (SI) 0.75

Documentation: /

Status: ONGOING

Action/Subject/Deliverable: *Observation pre-processing and diagnostic tools [DA 7]*

Feasibility study to implement/use FSOI. [DA 7.2]

No work reported.

Maintenance and development of observation preprocessing system [DA 7.5]

Provided in the DM's report.

Installation and customization of the Obsmon observation monitoring package. [DA 7.2]

Total efforts: /

Contributors: /

Documentation: /

Status: ONGOING

Action/Subject/Deliverable: *Basic data assimilation setup (DAsKIT) [DA 8]*

Follow the DAsKIT implementation plan which includes a gradual implementation of OI for the surface analysis and 3D-Var (with static B) for the upper-air analysis for the ALARO-based system. [DA 8.1]

In Poland, the preparatory work in order to setup a 2 km AROME surface and upper-air data assimilation has been performed. Surface stations from OPLACE are used.

A so called support-team working week was organized in Barcelona, with the main goal of familiarization and implementation of DA diagnostic tools.

Total efforts: 0.25 months

Contributors: M. Szczech-Gajewska (PL), A. Dumitru (CZ) 0.25

Documentation: /

Status: ONGOING

Action/Subject/Deliverable: *Algorithms for surface assimilation [SU 1]*

Validation of SEKF surface assimilation with SYNOP observations and operational upgrades

AROME-TEST has been running in parallel to the operational AROME/HU forecasts since November 2021 by Helga Tóth (HU). Simplified extended Kalman filter (SEKF) was applied in the test run for surface data assimilation, while in the operational AROME/HU model used the optimum interpolation (OI-main) method. A 1-month convective test period (2022. 05. 04 – 2022. 06. 01) was chosen to evaluate and compare the forecasts. The assimilation settings were as follows:

- XERROBS (T2M, HU2M) = 1.0, 0.07
- XSIGMA (WG2, WG1, TG2, TG1) = 0.15, 0.1, 2.0, 2.0
- XTPRT (WG2, WG1, TG2, TG1) = 10⁻⁴, 10⁻⁴, 10⁻⁵, 10⁻⁵

AROME-TEST was run in parallel to the operational forecasts 3 times a day (at 0, 6 and 12 UTC). During the test period, less than average precipitation fell, in the form of showers and thunderstorms. In some events intense hail also occurred in addition to stormy winds. Typically, however, local precipitation events dominated. At the first forecast hours, the two models performed similarly for 2 metre temperature, then the biggest difference usually appeared at night (Figure). In the case of forecasts beyond 24 hours, the difference between the two models decreased and AROME-TEST mostly performed better. The operational run had a smaller dew point error during the daytime hours, but the SEKF reduced the underestimation at night.

Events with a precipitation amount of less than 6-7 mm were underpredicted by the models, and events exceeding this threshold were overpredicted. For high precipitation events (>10 mm), AROME-TEST performed better and the difference between the two models increased proportionally as the threshold increased. The occurrence of false alarms was lower in AROME-TEST than in the operational model for almost all thresholds, and overestimation of the intensity was reduced. After its careful evaluation, SEKF was introduced in the operational AROME deterministic suite on 29 June 2022.

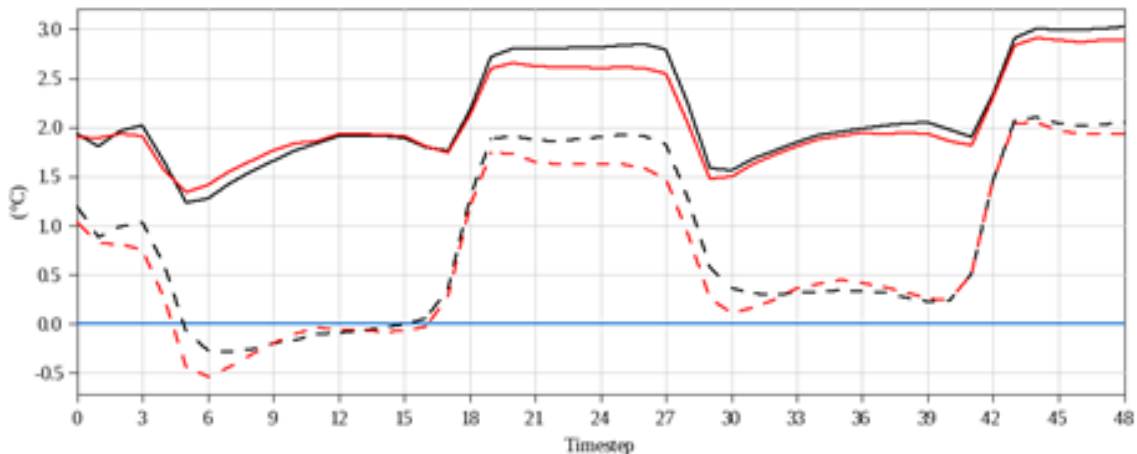


Figure S1.1: Bias (dashed line) and RMSE (solid line) of 2-metre temperature forecasts for the 0 UTC runs from 4 May to 1 June 2022. Curves represent: AROME-OPER (black), AROME-TEST (red).

Tuning of CANARI/MESCAN and OI soil assimilation

Radmila Brožková (CZ) has been testing the deep soil water reservoir analysis activity in CANARI. What is recommended and used now in ARPEGE and also AROME, is to make this activity dependent on the sun zenith angle μ_0 . When using this zenith angle dependency, then during the night or for small sun elevations, deep soil water increments are set to zero or are very small. This prevents the analysis from correcting the deep soil water reservoir at every analysis step, which is desirable. Otherwise, especially in spring and summer, with important diurnal amplitudes of T2M, RH2M, one gets oscillations of the soil water. This in turn modifies evaporation from soil and via the latent heat flux it influences T2M. In case we leave the analysis active, we get oscillations of soil water reservoir, together with T2M jumpiness from one model run to the next. Hence it is desirable not to touch the soil water that much. However, when activating the recommended sun zenith angle μ_0 option by setting SMU0=7. in the namelist, one gets another problem. In winter the analysis is almost inactive at our latitudes, and the soil gets too wet, with cold T2M bias. In summer, the analysis is active during the day time, mainly 12 UTC, and so the effect is drying, bringing also warm T2M bias. A modified version of the

TANH function argument was tested, however this helped only partially. Current experimentation involves testing another proposal based on the annual sun declination, where we need to suppress the analysis activity during spring and summer when diurnal amplitudes of screen level parameters are big. The current results are promising but a final version is not yet available.

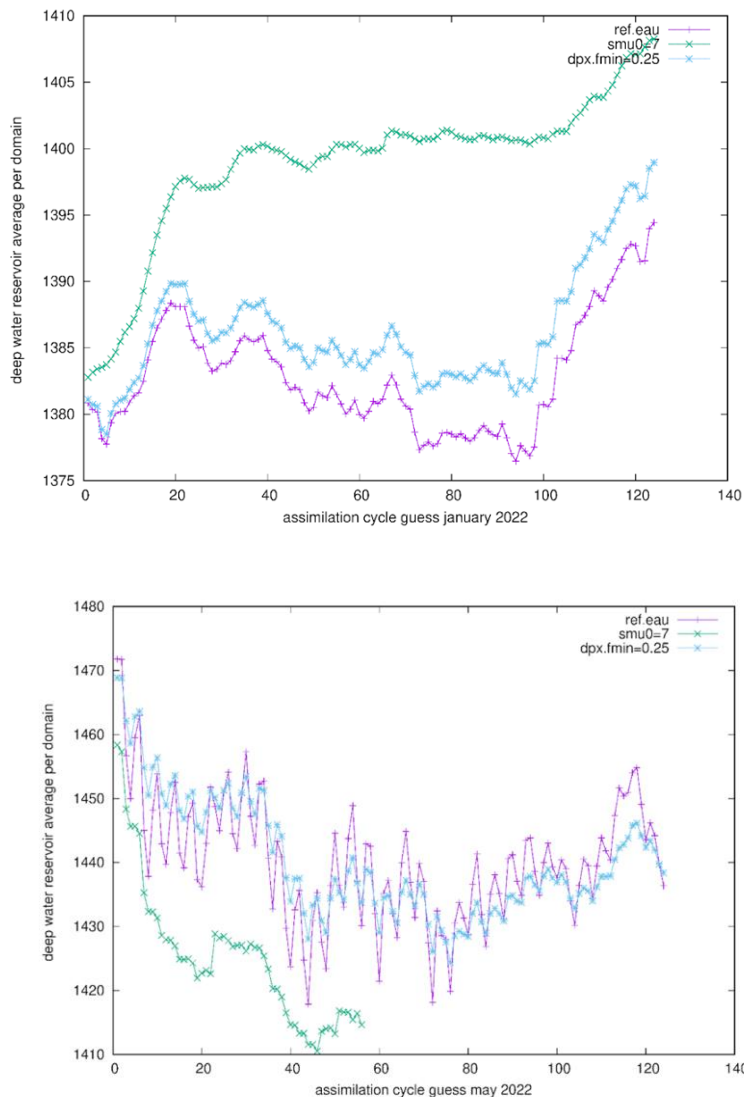


Figure S1.2: The evolution of the horizontal average of deep soil water reservoir during the assimilation cycle. The examples are from January and May 2022. In reference the deep soil water increment is not diminished, which in summer causes diurnal oscillations. When the modulation increments by solar zenith angle is applied setting $SMU0=7$, we remove diurnal

oscillations but in winter the reservoir drifts to wet and in summer to dry values and this impacts T2m accordingly. The third experiment (blue colour) modulates increments following the season (sun declination), i.e. they are more dumped in summer and less in winter.

Total efforts: 1.75 months

Contributors: H. Tóth (HU) 0.25, R. Brožková (CZ) 1.5 (CZ)

Documentation: /

Status: ONGOING

Action/Subject/Deliverable: *Use of observations in surface assimilation [SU 2]*

Assimilation of soil moisture products for use in surface data assimilation [SCATSAR-SWI] (combined Sentinel-1 + ASCAT product)

A 4-week stay at OMSZ Budapest was performed by Matjaž Ličar (SI) with Helga Tóth (HU) as the supervisor. The objective of the stay was to prepare an offline data assimilation experiment of satellite based soil moisture observations using a simplified extended Kalman filter algorithm with SODA. The Copernicus satellite product used as observations in the experiment is a fusion of Sentinel-1 C-band SAR and Metop ASCAT sensors. Satellite data is available daily on a lat/lon grid with a spatial resolution of 1km. Calibration of observations was performed with a CDF matching method and data from operational Hungarian AROME analyses. SURFEX was set up with 1 patch running the 3 layer ISBA force restore scheme on a domain identical to the AROME/HU domain. Several short experiments with forcing based on operational AROME/HU analyses were performed: an open loop run with no data assimilation, and several experiments with different control variable configurations and different prescribed observation errors. The results show that performing data assimilation in this manner is technically feasible, however additional work on tuning and validation is needed for applicable usage.

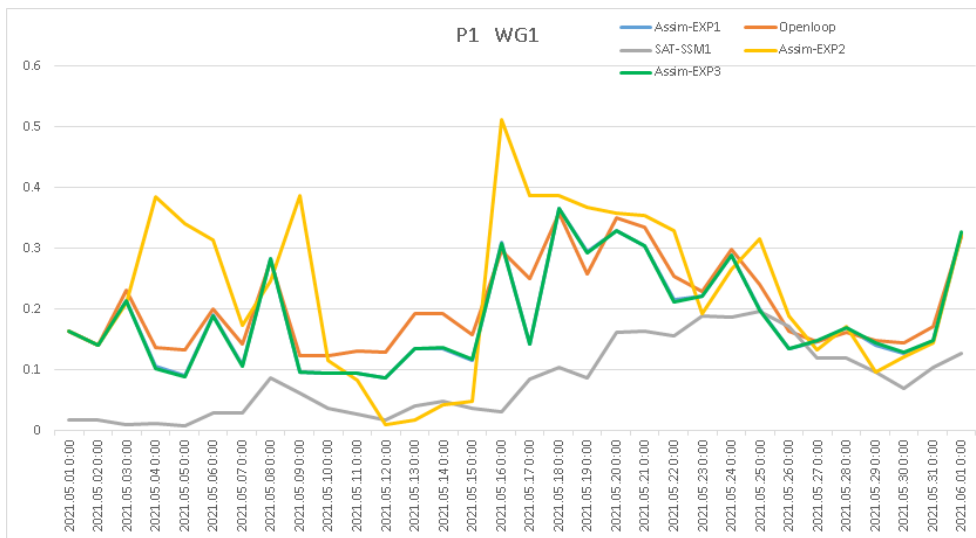


Figure S2.1: Satellite superficial soil moisture observations along with an open loop SURFEX run and various data assimilation experiments for a point near Budapest for a period of one month.

Assimilation of LAI within SEKF in AROME/SURFEX, impact experiments

A one month long period (2021-06-28 – 2021-07-28) was run by Balázs Szintai (HU) to investigate the impact of daily updated LAI in AROME/HU. This period was characterised by a severe drought over Southern Hungary and Northern Serbia which caused negative LAI anomalies in this region. The experimental run was the same as the reference, the only difference was that it was using LAI values computed by an offline SURFEX ISBA-Ags run applying the prognostic vegetation scheme. In the offline SURFEX run the LAI product from Copernicus Land Service (Sentinel-3) was assimilated with SEKF. Pointwise verification over the whole AROME/HU domain did not show impact on forecasted meteorological variables. The verification domain was reduced to an area of about 150 km x 150 km over Southern Hungary and Northern Serbia, affected by the drought. These scores show a slight improvement of 2 metre temperature during daytime (Figure). For 2 metre dewpoint a slight improvement is obtained in the first five forecast hours (until sunrise), then during daytime a slight deterioration can be observed. Verification scores for precipitation show mixed results: improvement is seen for low and high precipitation, but forecasts of moderate precipitation deteriorate.

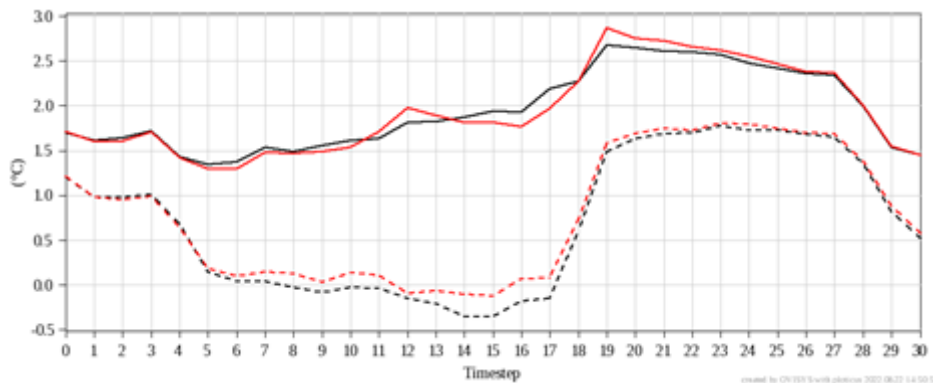


Figure S2.2: RMSE (solid line) and bias (dashed line) of 2 metre temperature forecasts for the time period 2021-06-28 – 2021-07-28 (only 0 UTC runs). Black: AROME reference simulation; red: AROME run using prognostic LAI.

Total efforts: 6.75 months

Contributors: H. Tóth (HU) 0.5, M. Ličar (SI) 1.25, B. Szintai (HU) 1.25, S. Schneider (AT) 1, S. Oswald (AT) 0.75, P. Schmederer (AT) 6.75

Documentation: /

Status: ONGOING

Documents and publications

Publications:

- Dian et. al. 2022: [Algorithmic amelioration of the deficiencies in the screen level parameters forecast based on a dynamical downscaling approach](#). 2nd ACCORD Newsletter, pp 91-95.

Stay reports:

- M. Ličar: Assimilation of Satellite Based SWI Observations using a Simplified Extended Kalman Filter Algorithm in SURFEX, 30 May – 24 June 2022, Budapest.
https://www.rlace.eu/media/files/Data_Assimilation/2022/repStay_MLicar_SWI-SEKF_OMSZ_2022.pdf

Other documentation:

- Peter Smerkol (updated on LACE forum and ACCORD wiki, 2022): [Documentation for the Homogenization Of Opera files \(HOOF\) tool](#)

RC LACE DA at 31th ALADIN Workshop & HIRLAM All Staff Meeting 2022, 30 March – 3 April 2022, Ljubljana.

List of presentations:

- Benedikt Strajnar: [Overview of RC LACE data assimilation activities](#)
- Antonin Bučánek: [Progress on reflectivity DA at CHMI](#)

National posters: Austria, Croatia, Czech Republic, Hungary, Poland, Slovakia, Slovenia, Romania.

Activities of management, coordination and communication

- 1) Joint 3rd ACCORD all staff workshop 2022, 27-31 March 2022, Ljubljana,
- 2) EUMETSAT MTG&EPS-SG User days, 31 May-2 June 2022, Darmstadt
- 3) Attendance to ACCORD DA working days on DA diagnostics and OOPS, 20 – 23 June 2022, Barcelona,
- 4) Informal LACE DA meetings (2nd Wednesday every two months),
- 5) ACCORD DA RT/ST topical meetings,
- 6) LSC meetings.

Summary of resources

| Action (PM) | Resource | | LACE stays (months) | |
|---|----------|------------------|---------------------|---------------------|
| | Planned | Realized (Q1-Q2) | Planned | Realized (till LSC) |
| Operational implementation of DA suites [COM3] | 8 | 6 | | |
| Further development of 3D-Var [DA 1] | 13.25 | 3.5 | | |
| Development of flow-dependent algorithms [DA 2] | 2 | 0 | | |
| Use of existing observations [DA 3.1] – radar | 20.5 | 11.5 | 2.25 | 2.25 (1 remote) |

| | | | | |
|--|---------------|-----------|----------|-------------------|
| Use of existing observations [DA 3] – other data types | 18 | 6 | | |
| Use of new observations types [DA 4] | 12 | 2.5 | 1 | cancelled |
| Development of assimilation setups suited for now-casting [DA 5] | 14 | 5 | | - |
| Participation in OOPS development [DA 6] | 3.5 | 2.75 | | |
| Observation pre-processing and diagnostic tools [DA 7] | 2 | - | | |
| Basic data assimilation setup (DAsKIT) [DA 8] | 7 | 3.25 | 0.75 | 1.5 (0.75 remote) |
| Algorithms for surface assimilation [SU 1] | 6 | 1.75 | | |
| Use of observations in surface assimilation [SU 2] | 8 | 6.75 | 1 | 1 |
| Total | 120.75 | 49 | 5 | 4.75 |

Problems and opportunities

The main problems in 2022 are/remain:

- *Distribute operational applications: local validation, maintenance and technical issues bring duplications of work that cannot be avoided.*
- *We are working on the different DA setups (cycle, method, resolution, physics) so individual results and setups are rarely directly applicable at other Members.*
- *After merge into ACCORD there are numerous subgroup meetings on DA and working weeks, making it difficult to keep track of all activities.*

Opportunities for more effective future work are:

- *Collaboration within the ACCORD consortium has generally improved, possibilities are numerous: ACCORD Wiki, RTs/STs on algorithms and observations, Slack communication exchange. More coordination with MF desired (e.g. common topical reporting).*
- *On the other hand we keep LACE internal communication, mainly to discuss implementation results. The first feedback was positive.*

- *To try to unify the local developments, e.g. to try to achieve approximately the same level of development in majority of member countries.*
- *To actively participate in discussions and knowledge exchange regarding EUMETNET observations such as E-ABO, E-GVAP and OPERA.*